


3.1 Passenger Approval Inspection Sticker - (MVC FORM #STK-19)



3.2 Bus Inspection Sticker - (MVC FORM STK-12)

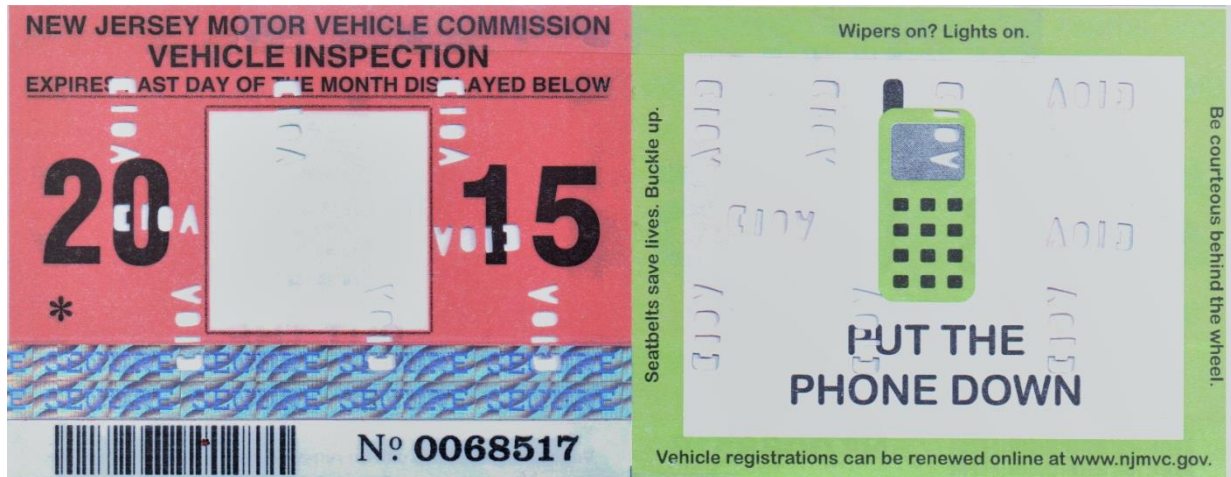

3.3 Diesel Emission Inspection Center Approval Sticker - (MVC FORM #STK-18)

The image shows two stickers. On the left is a 'NEW JERSEY' sticker with the number 'No. J428513' and a barcode. On the right is a 'Motor Vehicle Commission' sticker with the text 'Registration Must Be Renewed Before Inspection' and 'REGISTRATION INFORMATION'. It includes fields for 'PLATE:', 'VIN:', 'DEC. Lic.:', and 'Inspector:'.

3.4 New Vehicle Dealer Approval Sticker - (MVC FORM #STK-13)

The sticker is titled 'NEW JERSEY NEW VEHICLE DEALER' and 'INSPECTION'. It features two large empty rectangular boxes for signatures or stamps. Below the boxes, the text 'No AA- 0000001' is displayed, with the numbers '0000001' highlighted in yellow.

This form is titled 'REGISTRATION MUST BE RENEWED BEFORE INSPECTION' and includes the New Jersey state logo. It contains several horizontal lines for text entry, labeled as follows:

- RENEWAL DATE
- DEALER'S AUDIT ACCOUNT No.
- VEHICLE PLATE No.
- MECHANIC'S SIGNATURE

3.5 Bus Out of Service Sticker- (MVC FORM STK-15)

OUT OF SERVICE
NEW JERSEY
THIS VEHICLE IS NOT TO BE OPERATED
UNTIL REPAIRED IN ACCORDANCE WITH THE
"OUT OF SERVICE" NOTICE.

NOT VALID AFTER


No. G 24028

LICENSE PLATE NUMBER

"THIS VEHICLE HAS BEEN DECLARED OUT OF SERVICE
PURSUANT TO NEW JERSEY AND OR
FEDERAL LAW OR REGULATION"

THIS STICKER SHALL BE REMOVED ONLY UNDER
AUTHORIZED CONDITIONS. UNAUTHORIZED REMOVAL
IS PUNISHABLE BY A FINE.

3.6 Motor Vehicle Inspection Rejection Sticker - (MVC FORM #STK-21)

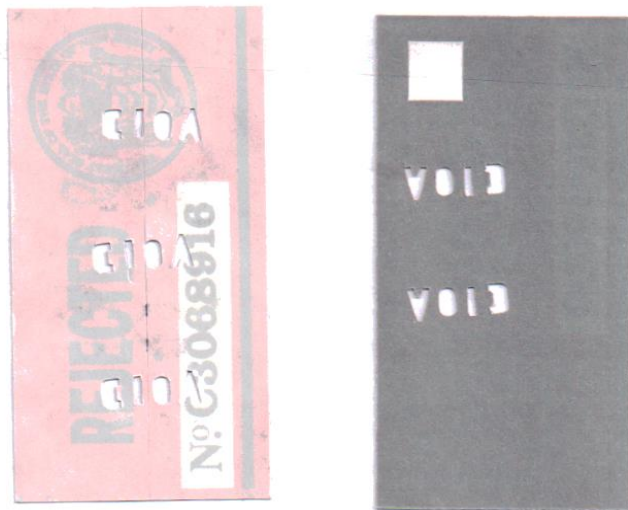

3.7 Tow Truck Decals -Light/Medium Duty - (MVC FORM #STK-27)



**APPLICATION
INSTRUCTIONS**

Affix one decal prominently
to each side of the cab.

Apply to a clean, dry surface and squeegee from
center to edge to remove trapped air. Do not
apply at temperature below 40 degrees F.

DO NOT MOISTEN DECAL

**APPLICATION
INSTRUCTIONS**

Affix one decal prominently
to each side of the cab.

Apply to a clean, dry surface and squeegee from
center to edge to remove trapped air. Do not
apply at temperature below 40 degrees F.

DO NOT MOISTEN DECAL

3.7 Tow Truck Decals - Heavy Duty - (MVC FORM #STK-27)



Affix one decal prominently to each side of the cab.

Apply to a clean, dry surface squeegee from center to edge to remove trapped air. Do not apply at temperatures below 40 degrees F.

DO NOT MOISTEN DECAL



Affix one decal prominently to each side of the cab.

Apply to a clean, dry surface squeegee from center to edge to remove trapped air. Do not apply at temperatures below 40 degrees F.

DO NOT MOISTEN DECAL

3.8 Pleasure Motorboat Registration Stickers - (MVC FORM # STK-11)



APPLICATION INSTRUCTIONS

Affix one decal on each side of the vessel facing forward; see illustration below:




Validation Decal
Three inches behind the letter

- Apply to dry, clean surface, squeegee from center to edge. Do not apply at temperatures below 40 degrees F. Do not moisten decal.

In the event the boat is sold or traded, the decal is to be removed or destroyed in such manner it is not usable.

APPLICATION INSTRUCTIONS

Affix one decal on each side of the vessel facing forward; see illustration below:

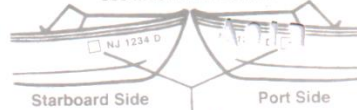


Validation Decal
Three inches behind the letter

- Apply to dry, clean surface, squeegee from center to edge. Do not apply at temperatures below 40 degrees F. Do not moisten decal.

In the event the boat is sold or traded, the decal is to be removed or destroyed in such manner it is not usable.

3.9 Inspection Inserts (Number) Strips - (MVC FORM #STK-14)

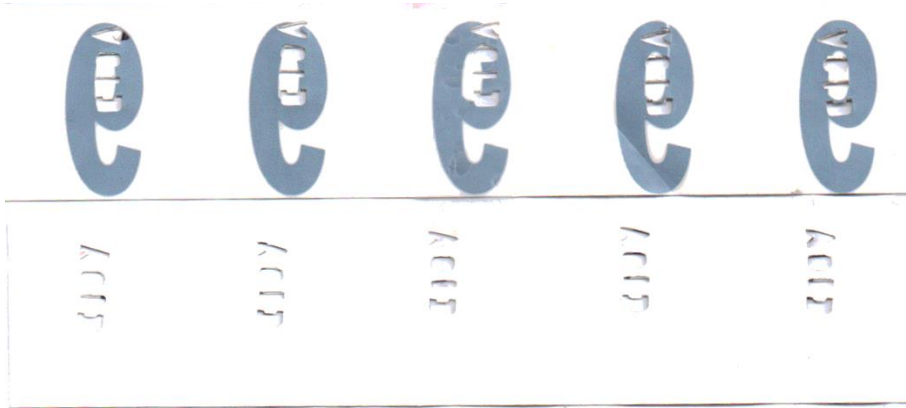

3.10 Inspection Inserts (Number) Rolls - (MVC FORM #STK-9)

