

ADVERTISEMENT FOR SEALED BID

The Madison County Board of Commissioners office is seeking sealed bids for the 2026 TSPLOST road projects for Madison County.

Specifications and bid packets must be obtained from the County Road Department at 1501 Highway 98 West, Danielsville, Georgia, 30633. Please contact the Road Department at 706-795-6260.

Bids should be sealed and clearly marked on the outside of the envelope:

“Sealed Bid #26-08 for 2026 TSPLOST Road Project for Madison County”

Bids are to be received no later than 10:00 a.m. on Tuesday, July 28, 2026. Bids opening will be held at 10:00 a.m. on Tuesday, July 29, 2026 in the Public Meeting Room at the Government Complex.

Bids may be mailed to Madison County Board of Commissioners, County Clerk's Office, 91 Albany Ave suite 306, Danielsville, Ga 30633 or they may be hand delivered to 91 Albany Ave, County Clerk's Office, Danielsville, Ga 30633.

The Board of Commissioners reserves the right to reject any and all bids. All bid packages must contain a **10% bid bond, 100% Performance Bond and O.C.G.A 13-10-91 E-Verify Affidavit** in order to be considered.

Advertisements ran July 2nd and July 16th

Locations, Description and Estimated Quantities

This project consists of Micro & Striping in Madison County. Locations will be designated by County or (Representative). In addition to the Georgia 2013 Standards Specifications and Special Provisions referenced, this work shall also be performed according to MUTCD OR the following Special Conditions.

- For this project, the advance warning signs specified in Subsection 150.3.04 shall be portable signs. These signs shall be placed only during times that construction is in progress or as conditions warrant as directed by county or (representative). Signs shall be removed at all other times. Costs for all Traffic Control shall be included in the LUMP SUM TRAFFIC CONTROL price.
- Any exceptions will be at the discretion of the county or (representative).
- Contractor and/or Subcontractor shall be responsible for all layouts. The costs for layout shall be included in the overall bid price.
- Prior to commencement of work, Contractor shall provide to Madison County or (Representative) for acceptance an asphalt job mix formula.
- All required testing shall be done by the Contractor and/or Subcontractor. This testing shall be performed by an independent laboratory. Test samples shall be obtained from the distributor tank, nurse tank, holding tank, and/or delivery tank as directed by the county or (representative). Samples may be required from all on site tanks. Final payment will not be made until all tests results have been provided to the Madison County or (Representative). The costs of all testing shall be included in the overall bid price.
- Any Loop Detectors that are damaged due to pavement preservation operations shall be replaced as per GDOT detail at locations designated by the Engineer, utilizing materials that are listed on the GDOT Qualified Products List (QPL). Testing of the loops shall be required. All necessary documentation regarding the loop detectors shall accompany the invoice before payment will be made. All costs associated with this work shall be included in the overall bid price.
- Prior to placement of any surfaces, existing shoulders shall be bladed no lower in elevation than the existing pavement or shoulder. All costs associated with this work shall be included in the overall bid price.
- All existing RPMs shall be removed prior to any surface operations. All costs associated with this work shall be included in the Lump sum traffic control price.
-
- The existing centerline and edge line pavement markings shall be replaced per 652 spec pavement markings for the full length of Resurfacing / Pavement preservation operations. Temporary centerline and edge lines shall be replaced according to Special Provision Section 150. Final centerline and edge lines shall be according to the Standard Specification Section 652. RPM's (Including any Type 10's) shall be replaced for the full length of pavement preservation operations. TWO RPMS will be placed on centerline at 80 foot intervals on all final surfaces. Thermoplastic pavement markings damaged by pavement preservation operations shall be replaced in kind. Thermoplastic shall be replaced according to Standard Specification Section 653. Thermo includes stop bars, arrows/words, crosswalks, hatching, R/R symbols, etc. The contractor is responsible for visiting project site to determine the amount/type of pavement markings needed. All costs for pavement markings and RPM's (all types) shall be paid for by striping pay item.
-
- Final striping shall not commence until 30 calendar days after completion of MICRO Pavement operations.
- Restripe Roadway according to existing conditions.
- Start date will be no earlier than September 28TH. COMPLETION date for MICRO will be October 31, 2026. Contractor will coordinate with county on these dates. Micro stockpile material shall be in place 7 days before start of micro resurfacing.
- Final Striping must be completed no later than December 15, 2026.
- All SUBS must be submitted and approved by county or (representative).

- The Contractor shall not take advantage of any error or omission in any of the Contract components. In the event the Contractor discovers an error or omission, the Contractor shall immediately notify the County.
-
- A Performance Bond equal to 100% of the Award Price, must be provided by the successful Bidder. Bonds given shall meet the requirements of the law of the State of Georgia including, but not limited to, O.C.G.A. §13-10-1 and §32-2-70 et seq.

Under no circumstances shall the total invoiced amount exceed the Bid Total shown of this agreement unless approved by county. The contractor shall continuously monitor the quantities and the costs associated with the work contained in this agreement to prevent any such situation. The contractor shall notify the COUNTY OR (REPRESENTATIVE) in a timely manner in order to prevent any such situation from occurring.

The contractor shall coordinate with Madison County or (Representative) regarding any necessary time restrictions and for inspection of the work. No work will be allowed on Sundays.


The county reserves the right to make any changes to typical or road list as necessary.

Non Refundable deduction of \$ 500.0 per day, can be assessed for not meeting completion dates.

See Typical Section, and Special Provision Section.

Project No: TSPLOST 26 MICRO
County: **MADISON**

County: **MADISON****Estimate Total**

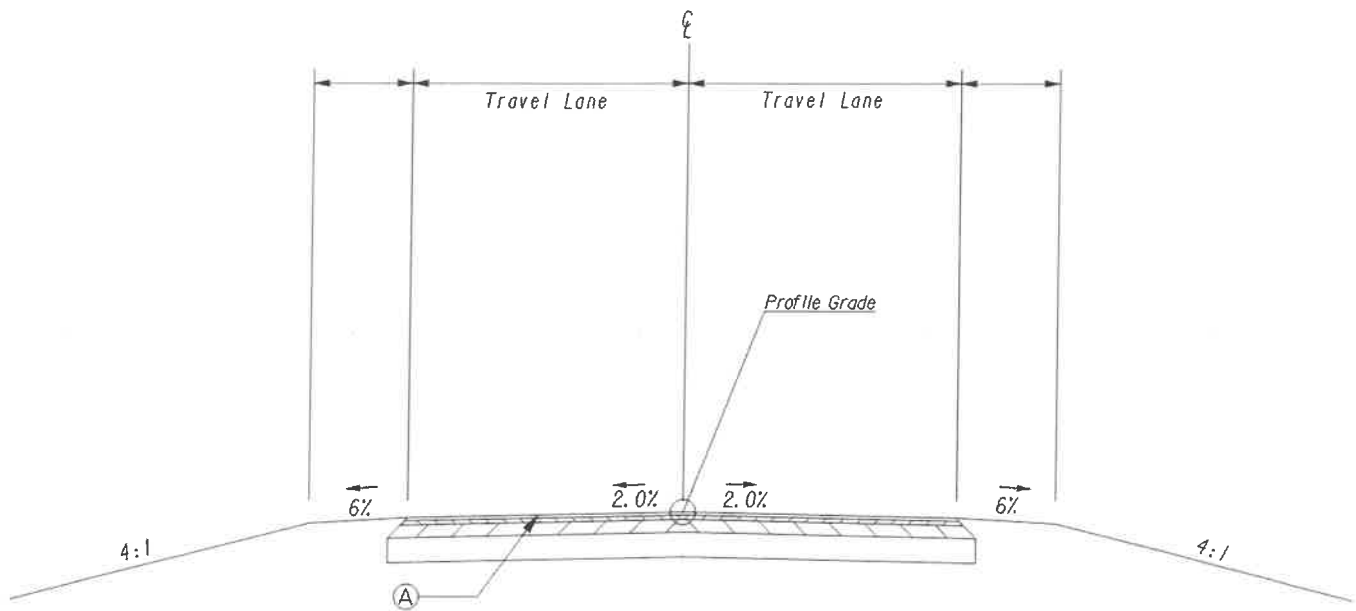

MICRO will be directed by engineer.

County reserves the right to make changes to the list below.

- A. MICRO @ 25# LBS/SY OR AS DIRECTED BY ENGINEER
- B. PAOLI RD- SR 72 TO OLD SR 72 – 2.3 M
- C. HORACE REED RD -HUDSON RIVER CH TO WESLEY CHAPEL – .95M
- D. PARHAM TOWN- SR 281 TO SR COUNTY LINE – 3.15M
- E. SHILOH FORT LAMAR -SR 106 TO SR 174 – 3.4M

TYPICAL SECTION

NOT TO SCALE