



Bid Solicitation Attachment #1 – Topsoil Stabilization Matting

SWALE OR DITCH


DOUBLE WIDTH MATTING AND BLANKETS IN SWALE, USE 3'-6" OVERLAP WHERE TWO OR MORE STRIPS ARE REQUIRED, AND STAPLE ON 2'-0" CENTERS

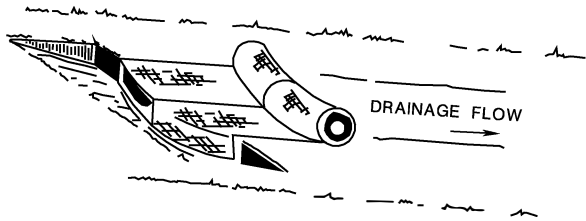

BURY TOP END OF MATTING AND BLANKETS IN A 6" TRENCH
TAMP TRENCH FULL OF SOIL. SECURE WITH ROW OF STAPLES,
12" MAXIMUM SPACING 4" DOWN FROM TRENCH.

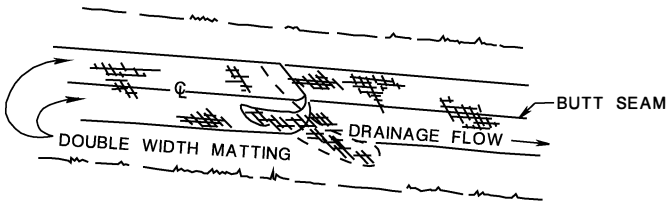


OVERLAP: BURY UPPER END OF LOWER STRIP
AS PER ABOVE DETAIL. OVERLAP END OF TOP
STRIP 6" AND STAPLE EITHER SIDE OF JOINT.

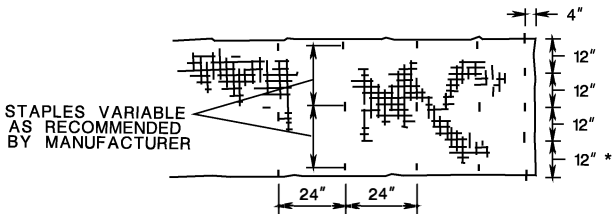

* DEPENDANT ON
WIDTH OF PRODUCT

SECURE MATTING AND BLANKETS WITH STAPLES SPACED 24" APART
ALONG THE SIDES AND DOWN THE CENTER. AT THE ENDS OF THE
MATTING AND AT 50 FOOT INTERVALS STAPLES SHALL BE PLACED
12" APART ACROSS THE WIDTH.




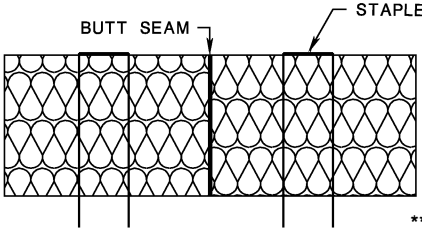


** REFER TO SE&SC MANUAL
FOR WHERE THIS TREATMENT
IS TO BE USED.

EXCELSIOR BUTT SEAM

TOPSOIL STABILIZATION MATTING

INLET AND MOUND

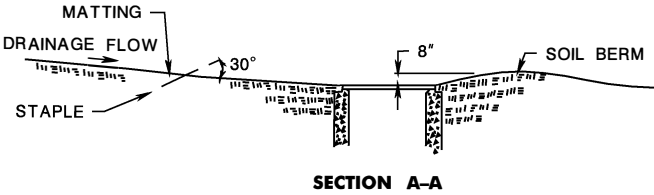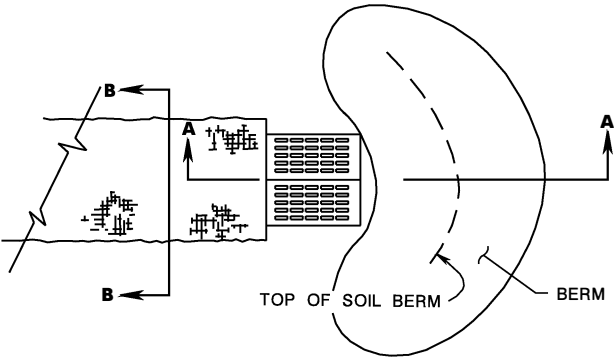

TOPSOIL STABILIZATION

N.T.S.

CD-807-1

NEW JERSEY DEPARTMENT OF TRANSPORTATION

CONSTRUCTION DETAILS

CD-807-1.1