Pantheon Saloon/Red Front Roofs – **Parapet Caps and Roofing to be removed by NPS**

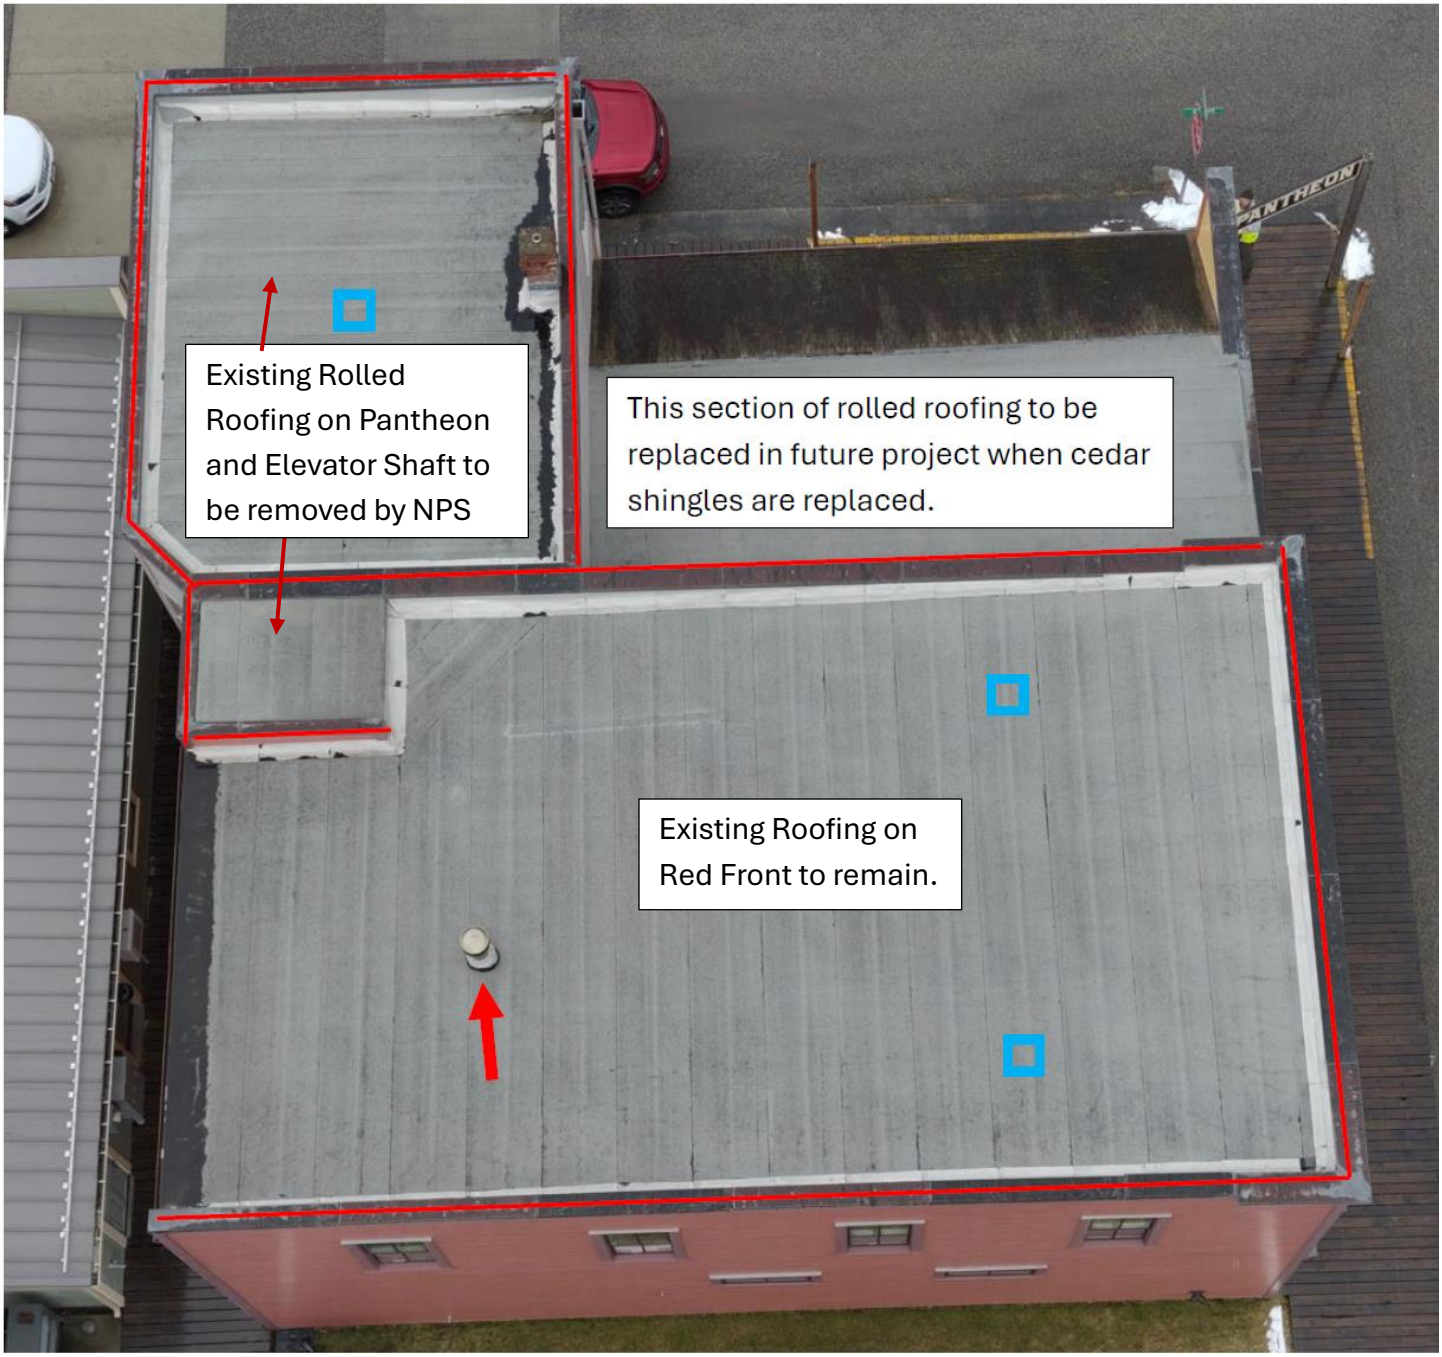

Red lines indicate parapet wall caps to be removed and replaced by NPS Preservation Crew. All grey roofing between the red lines is what will be recovered with new polyvinylchloride (PVC) membrane roofing material. NPS will remove existing rolled roofing on the Pantheon and Elevator Shaft roofs. Existing rolled roofing on the Red Front will remain and be recovered. Chimney (Indicated by large red arrow) on the red front roof is no longer used since the conversion to heat pumps and will be removed by NPS Day labor and the roof penetration recovered with matching sheathing to match existing. Blue Squares are approximate locations of roof fall protection anchors.

KLGO 331433A
April, 2026

Exhibit B

Pantheon Saloon/Red Front Roofs – **Parapet Caps and Roofing to be removed by NPS**

Red box indicates area of Pantheon roof known to have sheathing damage from water infiltration caused by the leaking scupper (indicated by the arrow) flashing that was repaired during the 2023 exterior finishes project. On going leak into the workroom during certain weather conditions is near the chimney. The black "Henry's Roof Patching" has been our attempt to mitigate the leak. NPS will remove entirety of existing roofing on Pantheon Roof and repair/replace sheathing and joists necessary prior to contractor arrival.