Tasks 1 and 2

Bldg 1 – Floor 3, Room D333, D335, and D335A

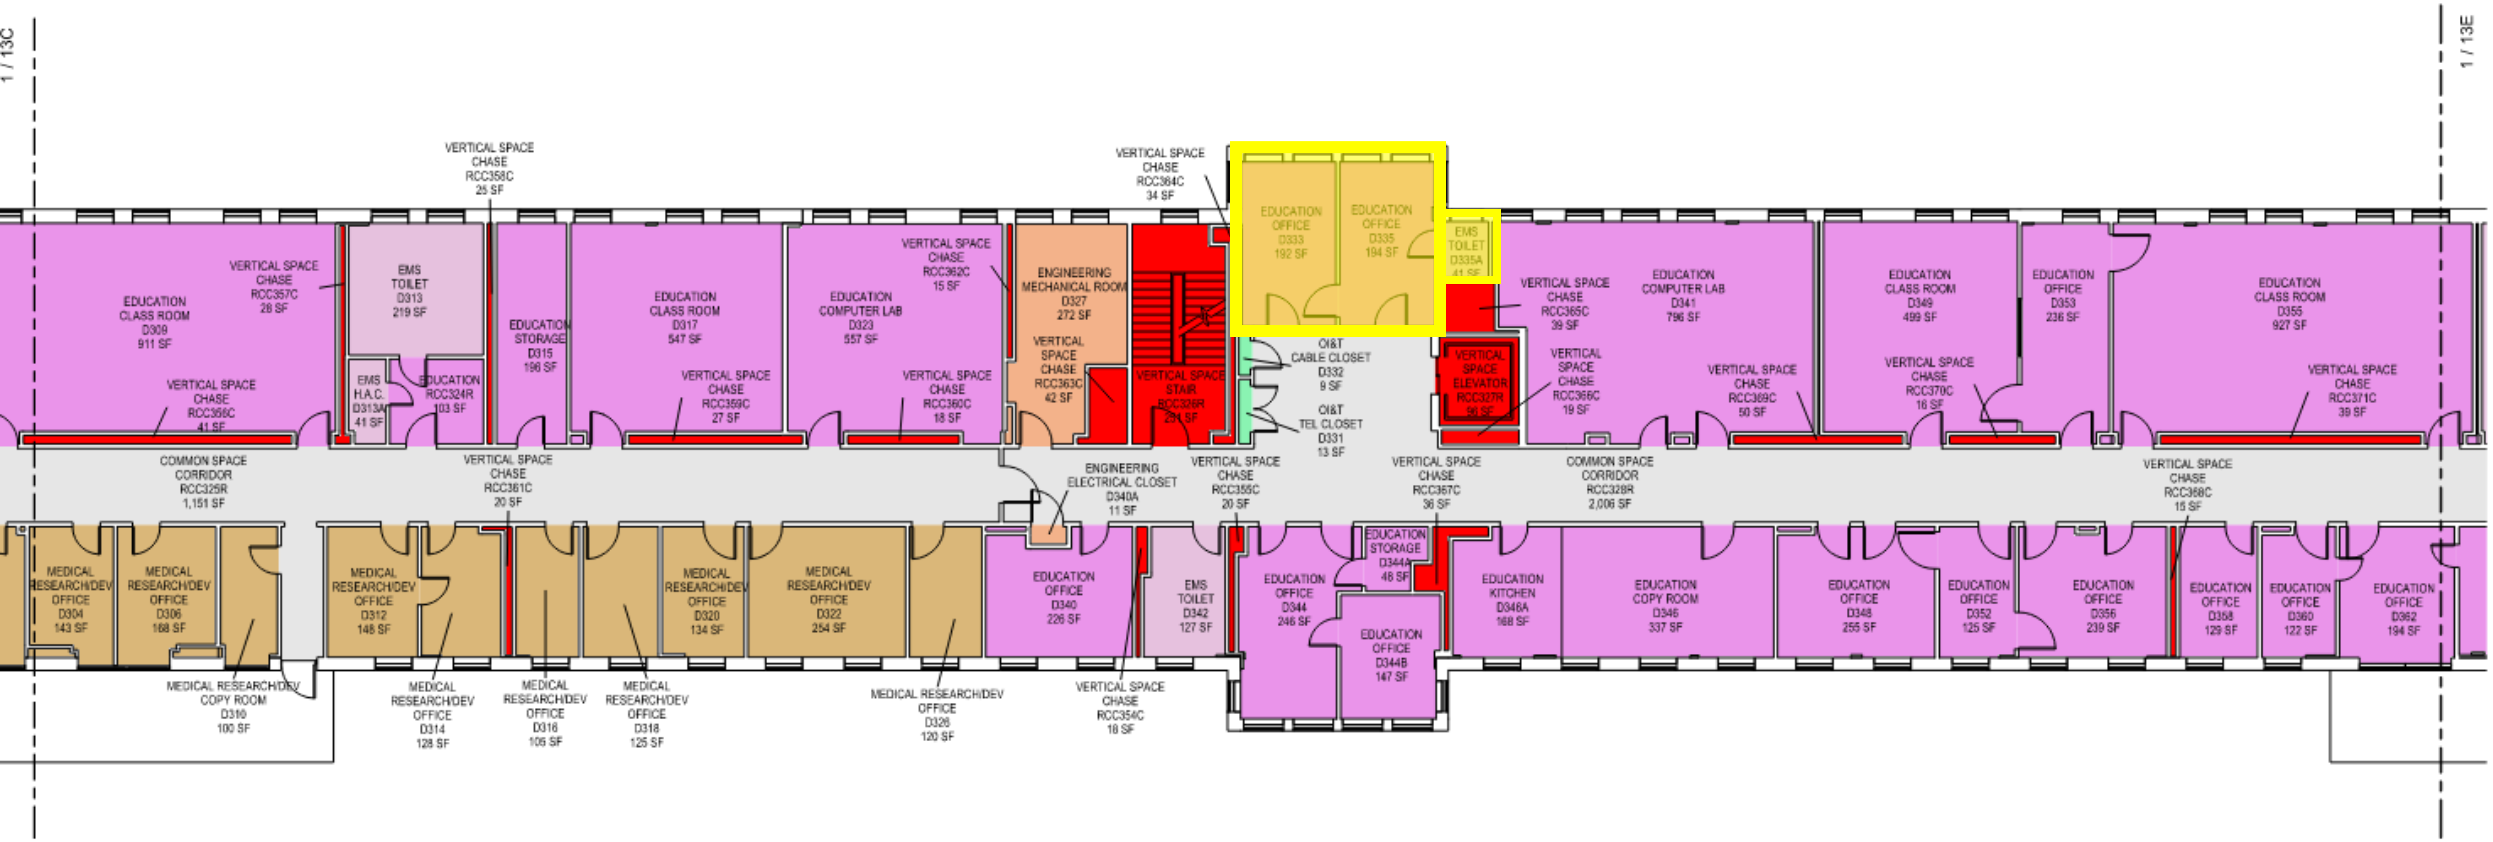

- Abate all lead paint – excluding all windows – contractor shall assume all paint is lead based paint.
- Abate all ACM floor tile, ceiling tile, glue dots, mastic, pipe insulation, pipe fittings, and pipe elbows
- Re-insulate all abated piping, pipe fittings, and pipe elbows.
- This work can be completed during Monday-Friday day shift hours

Calendar Days = 8
Abatement Days = 6
Monitoring Days = 8

Tasks 3, 4, and 5

Bldg 1 – Floor 4, Room D405, D407, D407A, D409 and D409A

- Abate all lead paint – excluding all windows – contractor shall assume all paint is lead based paint.
- Abate all ACM floor tile, ceiling tile, glue dots, mastic, pipe insulation, pipe fittings, and pipe elbows
- Re-insulate all abated piping, pipe fittings, and pipe elbows.
- This work can be completed during Monday-Friday day shift hours

Calendar Days = 10
Abatement Days = 8
Monitoring Days = 10

Tasks 6

Bldg. 200 Stone space – Example of an existing condition

- Abate all ACM pipe insulation, pipe fittings, and pipe elbows
- Re-insulate all abated piping, pipe fittings, and pipe elbows.
- This work can be completed during Monday-Friday day shift hours

Calendar Days = 34
Abatement Days = 32
Monitoring Days = 34